

HL series

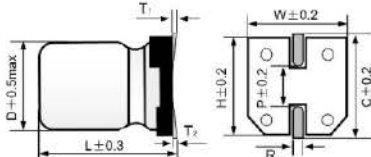
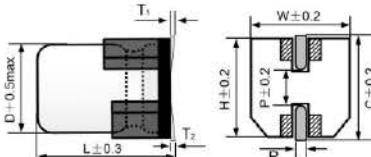
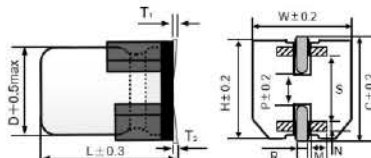
- Low ESR, high ripple current 低等效串联电阻, 耐高纹波电流
- Load life of 15000 hours at 105°C 工作寿命 105°C-15000 小时
- Compliant to the RoHS2.0 directive 符合 RoHS2.0 规范
- Compliant to AEC-Q200, contact us for more information 符合 AEC-Q200 标准, 详情请另行咨询



Specifications 系列参数

Items 项目	Characteristics 特性	
Rated Voltage Range 额定电压范围	25V ~ 80V DC	
Capacitance Range 容量范围	6.8 ~ 330μF	
Capacitance Tolerance 容量偏差	M : ±20%	
Operating Temp. Range 工作温度范围	-55°C ~ +105°C	
Dissipation Factor 损耗角正切	Not to exceed the value specified 不超过规格值	
Leakage Current 漏电流	$I \leq 0.01CV$ (after 2 minutes) 充电 2 分钟后测试漏电流不超过 $0.01 \times (\text{静电容量 } \mu F) \times (\text{额定电压 } V)$	
ESR (100K~300KHz) 等效串联电阻	Not to exceed the value specified 不超过规格值	
Endurance: 105°C · 15000h Rated voltage applied (with the rated ripple current) 寿命: 105°C, 15000 小时 加载额定电压 (叠加额定纹波电流)	Capacitance Change 容量变化	Within ±30% of the value before test 初始值±30%以内
	Dissipation Factor 损耗角正切	Not to exceed 200% of the value specified 不超过 2 倍规格值
	ESR 等效串联电阻	Not to exceed 200% of the value specified 不超过 2 倍规格值
	Leakage current 漏电流	Not to exceed the value specified 不超过规格值
Moisture Resistance 85°C · RH85% · 2000h · Rated voltage applied 耐湿性 85°C, RH85% 加载额定电压连续工作 2000 小时	Capacitance Change 容量变化	Within ±30% of the value before test 初始值±30%以内
	Dissipation Factor 损耗角正切	Not to exceed 200% of the value specified 不超过 2 倍规格值
	ESR 等效串联电阻	Not to exceed 200% of the value specified 不超过 2 倍规格值
	Leakage Current 漏电流	Not to exceed the value specified 不超过规格值

Dimensions 尺寸 (Unit单位:mm)

Standard 标准产品		<table><tr><th>ΦD</th><th>L</th><th>W</th><th>H</th><th>C</th><th>P</th><th>R</th><th>T₁、T₂</th></tr><tr><td>6.3</td><td>6.2</td><td>6.6</td><td>6.6</td><td>7.2</td><td>2.1</td><td>0.5~0.8</td><td>0.2max.</td></tr><tr><td>6.3</td><td>7.7</td><td>6.6</td><td>6.6</td><td>7.2</td><td>2.1</td><td>0.5~0.8</td><td>0.2max.</td></tr><tr><td>8</td><td>10.5</td><td>8.3</td><td>8.3</td><td>9.0</td><td>3.2</td><td>0.8~1.1</td><td>0.2max.</td></tr><tr><td>10</td><td>10.5</td><td>10.3</td><td>10.3</td><td>11.0</td><td>4.6</td><td>0.8~1.1</td><td>0.2max.</td></tr></table>	ΦD	L	W	H	C	P	R	T ₁ 、T ₂	6.3	6.2	6.6	6.6	7.2	2.1	0.5~0.8	0.2max.	6.3	7.7	6.6	6.6	7.2	2.1	0.5~0.8	0.2max.	8	10.5	8.3	8.3	9.0	3.2	0.8~1.1	0.2max.	10	10.5	10.3	10.3	11.0	4.6	0.8~1.1	0.2max.
ΦD	L	W	H	C	P	R	T ₁ 、T ₂																																			
6.3	6.2	6.6	6.6	7.2	2.1	0.5~0.8	0.2max.																																			
6.3	7.7	6.6	6.6	7.2	2.1	0.5~0.8	0.2max.																																			
8	10.5	8.3	8.3	9.0	3.2	0.8~1.1	0.2max.																																			
10	10.5	10.3	10.3	11.0	4.6	0.8~1.1	0.2max.																																			
Anti-vibration 耐振产品		<table><tr><th>ΦD</th><th>L</th><th>W</th><th>H</th><th>C</th><th>P</th><th>R</th><th>T₁、T₂</th></tr><tr><td>6.3</td><td>6.2</td><td>6.6</td><td>6.6</td><td>7.2</td><td>2.1</td><td>0.5~0.8</td><td>0.2max.</td></tr><tr><td>6.3</td><td>7.7</td><td>6.6</td><td>6.6</td><td>7.2</td><td>2.1</td><td>0.5~0.8</td><td>0.2max.</td></tr></table>	ΦD	L	W	H	C	P	R	T ₁ 、T ₂	6.3	6.2	6.6	6.6	7.2	2.1	0.5~0.8	0.2max.	6.3	7.7	6.6	6.6	7.2	2.1	0.5~0.8	0.2max.																
	ΦD	L	W	H	C	P	R	T ₁ 、T ₂																																		
6.3	6.2	6.6	6.6	7.2	2.1	0.5~0.8	0.2max.																																			
6.3	7.7	6.6	6.6	7.2	2.1	0.5~0.8	0.2max.																																			
		<table><tr><th>ΦD</th><th>L</th><th>W</th><th>H</th><th>C</th><th>P</th><th>R</th><th>M</th><th>N</th><th>S</th><th>T₁、T₂</th></tr><tr><td>8</td><td>10.5</td><td>8.3</td><td>8.3</td><td>9.0</td><td>3.2</td><td>0.8~1.1</td><td>1.35</td><td>0.7</td><td>5.40</td><td>0.2max.</td></tr><tr><td>10</td><td>10.5</td><td>10.3</td><td>10.3</td><td>11.0</td><td>4.6</td><td>0.8~1.1</td><td>1.35</td><td>1.0</td><td>6.74</td><td>0.2max.</td></tr></table>	ΦD	L	W	H	C	P	R	M	N	S	T ₁ 、T ₂	8	10.5	8.3	8.3	9.0	3.2	0.8~1.1	1.35	0.7	5.40	0.2max.	10	10.5	10.3	10.3	11.0	4.6	0.8~1.1	1.35	1.0	6.74	0.2max.							
ΦD	L	W	H	C	P	R	M	N	S	T ₁ 、T ₂																																
8	10.5	8.3	8.3	9.0	3.2	0.8~1.1	1.35	0.7	5.40	0.2max.																																
10	10.5	10.3	10.3	11.0	4.6	0.8~1.1	1.35	1.0	6.74	0.2max.																																

Capacitance List 容量对照表

W.V (S.V) SIZE	25 (31)	35 (44)	50 (63)	63 (79)	80 (100)
6.3×6.2	47 ~ 56 μ F	22 ~ 47 μ F	10 ~ 22 μ F	6.8 ~ 15 μ F	6.8 ~ 10 μ F
6.3×7.7	68 ~ 100 μ F	47 ~ 68 μ F	22 ~ 33 μ F	10 ~ 22 μ F	10 ~ 15 μ F
8×10.5	150 ~ 220 μ F	100 ~ 150 μ F	47 ~ 82 μ F	33 ~ 56 μ F	22 ~ 33 μ F
10×10.5	180 ~ 330 μ F	120 ~ 270 μ F	56 ~ 120 μ F	47 ~ 82 μ F	27 ~ 47 μ F

Characteristics List 规格特性表

W.V. 工作电压 (V)	Capacitance 容量 (μ F)	tg δ 损耗角正切 (120Hz, 20°C)	ESR 等效串联电阻 (m Ω , 100kHz)	Rated Ripple Current 额定纹波电流 (105°C, mA, r.m.s)	Size 尺寸 Φ D×L(mm)	Part Number 物料编码
25	47	0.12	50	1300	6.3×6.2	PHL470M025E62TR□□□□
	100	0.12	30	2000	6.3×7.7	PHL101M025E77TR□□□□
	220	0.12	27	2300	8×10.5	PHL221M025F1ETR□□□□
	330	0.12	20	2500	10×10.5	PHL331M025G1ETR□□□□
35	47	0.12	60	1300	6.3×6.2	PHL470M035E62TR□□□□
	68	0.12	35	2000	6.3×7.7	PHL680M035E77TR□□□□
	150	0.12	27	2300	8×10.5	PHL151M035F1ETR□□□□
	270	0.12	20	2500	10×10.5	PHL271M035G1ETR□□□□
50	22	0.10	80	1100	6.3×6.2	PHL220M050E62TR□□□□
	33	0.10	40	1600	6.3×7.7	PHL330M050E77TR□□□□
	82	0.10	30	1800	8×10.5	PHL820M050F1ETR□□□□
	120	0.10	25	2400	10×10.5	PHL121M050G1ETR□□□□
63	10	0.08	120	1000	6.3×6.2	PHL100M063E62TR□□□□
	22	0.08	80	1500	6.3×7.7	PHL220M063E77TR□□□□
	56	0.08	40	1700	8×10.5	PHL560M063F1ETR□□□□
	82	0.08	30	2000	10×10.5	PHL820M063G1ETR□□□□
80	10	0.08	120	900	6.3×6.2	PHL100M080E62TR□□□□
	15	0.08	85	1400	6.3×7.7	PHL150M080E77TR□□□□
	33	0.08	45	1600	8×10.5	PHL330M080F1ETR□□□□
	47	0.08	35	1900	10×10.5	PHL470M080G1ETR□□□□

* For the last 4 digits of the part number, please refer to the part number system on page .

物料编码的最后 4 位, 请参考 178 页物料编码系统。

Frequency Coefficient for Ripple Current 纹波电流频率系数

Frequency 频率	120Hz≤freq.<1KHz	1KHz≤freq.<10KHz	10KHz≤freq.<50KHz	50KHz≤freq.<100KHz	100KHz≤freq.<1000KHz
Coefficient 系数 (C≤47 μ F)	0.05	0.25	0.55	0.80	1.00
Coefficient 系数 (C>47 μ F)	0.05	0.30	0.70	0.85	1.00